



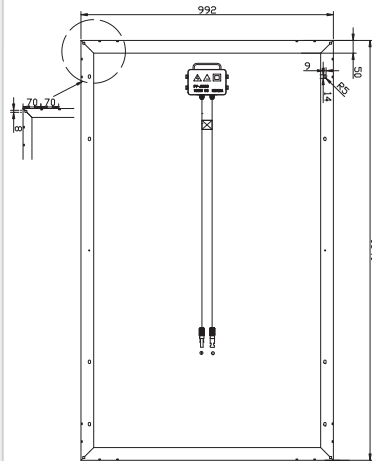

SIMAX 156 Solarmodule SQP672-250W

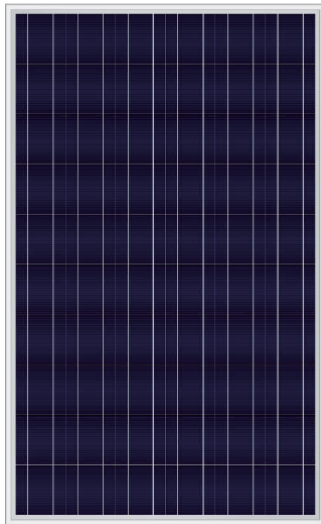

Mechanical Characteristics

Solar Cell	Polycrystalline silicon 156x156(mm)
No. of Cells	72 (6 x 12)
Dimensions	1640 x 992 x 40 (mm)
Weight	19.2 kg
Front Glass	3.2mm (0.13 inches) tempered glass
Frame	Anodized aluminum alloy

Output

Cable Type	Ø = 4 mm ²
Lengths	L = 900 mm
Junction Box	PV - JB003 MC4

Temperature Coefficients

Nominal Operating Cell Temperature (NOCT)	45 ± 2°C
Temperature Coefficient of (P _{max})	-0.39% / °C
Temperature Coefficient of (V _{oc})	-0.34% / °C
Temperature Coefficient of (I _{sc})	0.035% / °C





Photon

Parameters	SQP672-250W
Peak power [Wp] P _{mpp}	250W
Power Tolerance	0~+/-3%
Module Efficiency (%)	15.2%
Open circuit voltage [V] V _{oc}	43.5
Maximum Power Voltage [V] (V _{mpp})	36.2
Maximum Power Current [A] (I _{mpp})	6.91
Short circuit Current [A] (I _{sc})	7.52

STC: Irradiance : 1000 W/m²; Spectrum AM 1.5; Cell temperature: 25°C; Wind 0 m/s

- Provide the best solutions for photovoltaic power generation and technical support
- Provide Cost-effective products
- Provide 12 Years Quality Warranty
- Power out ≥ 90% in 10 years
- Power out ≥ 80% in 25 years

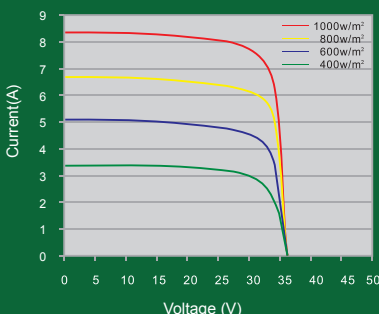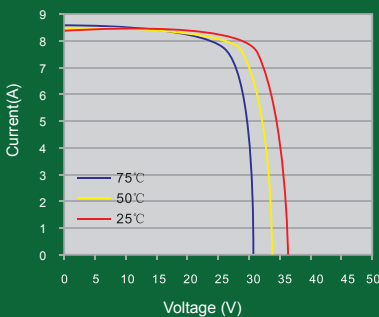

Simax Green New Energy (Europa) GmbH
 Mergenthaler Allee 23 / 25
 65760 Eschborn / Germany
 Tel.: +49 6196 9739 525
 Fax: +49 6196 5929 684
 info@simaxsolar.com
 www.simaxsolar.de

Simax (Suzhou) Green New Energy Co.,ltd
 Address: No. 567 Suzhou Road, Taicang city,
 Jiangsu province, China
 P.C.: 215400
 Tel: +86 512 5337 8555
 Fax: +86 512 5337 8556
 info@simaxsolar.com
 www.simaxsolar.com

Simax (Australia) Green New Energy Pty Ltd
 5/78 Frankston Gardens Drive,
 Carrum Downs, VIC 3210
 Tel: +61 03 9708 2400
 Fax: +61 03 9708 2482
 info@simaxsolar.com
 www.simaxsolar.com.au